


# Enhance Effio-E Box Camera RYK-CA67, CA68

## FEATURES

- Enhance Effio-E Platform
- Sony High-Resolution 960H CCD
- 700TV Line
- C/CS Mount
- Auto Flip Control
- OSD Interface
- Optional: DC12V / AC24V Dual Power  
100~240V AC Power



## DIMENSIONS

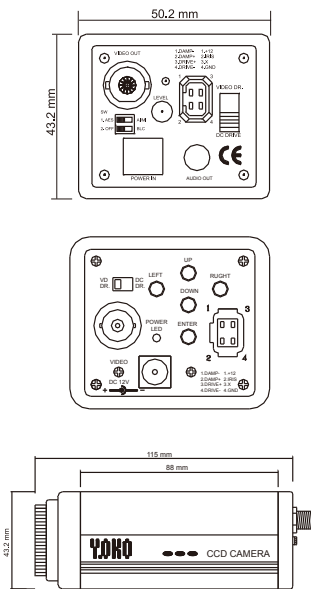

## SPECIFICATIONS

Model No.		RYK-CA67D	RYK-CA68D
VIDEO	Image Device	1/3" Color Sony Exview HAD II CCD	1/3" Color Sony Super HAD II CCD
	Picture Elements	NTSC:976x494, PAL:976x582	
	Resolution	700 TVL	
	Illumination	0.01 Lux @ F1.2 Color Mode	
	S/N Ratio	More than 50dB	
	Electronic Shutter	Auto: 1/50~1/100,000 Manual: 1/50(60), 1/100(120), 1/250, 1/500, 1/1000, 1/3000, 1/5000, 1/100,000	
LENS	Lens Mount	C / CS Mount	
	Iris Control	Auto / Manual	
DAY / NIGHT	IR-Cut filter Removable	N/A	
	Day & Night	Auto / Day / Night / External	
FUNCTIONS	On-Screen-Display (OSD)	Yes	
	Language	English / Japanese / German / French / Russian / Portuguese / Spanish / Simplified Chinese	
	Wide Dynamic Range (WDR)	On / Off	
	Adaptive Tone Reproduction (ATR)	On / Off	
	Digital Noise Reduction (DNR)	On / Off	
	High light compensation (HLC)	On / Off	
	IR Optimizer function	On / Off	
	White Balance	ATW / Manual / Push / ANTI CR / USER1 / USER2 / Push Lock	
	Gain Control	Auto	
	Back Light Comp.	On / Off	
	Flickerless Mode	On / Off	
	Mirror	On / Off	
	Freeze	NTSC:1/100, PAL:1/120	
	Positive / Negative	On / Off	
	Motion Detection	4 free areas (Area size adjustable)	
	Privacy Masking	8 free areas (Area size adjustable)	
Camera Title	Up to 52 characters		
GENERAL	I/O Interface	N/A	
	Remote Control	N/A	
	Protocol	N/A	
	Baud Rate	N/A	
	Sync. System	Internal	
	Video Output	1 Vp-p / 75 Ohms CVBS (BNC)	
	Dimension	50.2x43.2x115mm	
	Power Supply	DC12V (Optional: DC12V / AC24V, 100~240V AC Power)	
	Power Consumption	110mA	
Operating Temp.	-10°C ~ 50°C (14°F to 122°F)		